

1.0 GENERAL

The transmitter is a second generation 'Smart' in head temperature transmitter that accepts any commonly used temperature sensor, slide wire transducer or millivolt signal and converts the output to the industry standard 4-20mA transmission signal. The software package RCPW can be used to program the unit.

2.0 SPECIFICATION @ 20°C

2.11 RTD Input (Pt100)

Sensor Range	-200 to +850°C (18 to 390 ohms)
Minimum Span ¹	25°C
Linearisation	BS EN 60751 (IEC 751) BS 1904 (DIN 43760) JISC 1604 CUSTOM [X] ³
Basic Measurement Accuracy ²	±0.01% FRI ±0.05% Rdg (FRI = Full Range Input)
Thermal Drift	Zero 0.008 °C/°C, Span 100 ppm / °C
Excitation Current	300µA to 550µA
Maximum Lead Resistance	50 ohms / leg
Lead Resistance Effect	0.002°C / ohm

2.12 Thermocouple Input

Sensor Ranges	Thermocouple Type	Measuring Range °C ⁴	Minimum Span ¹ °C
	TC Type K	-200 to 1370	50
	TC Type J	-200 to 1200	50
	TC Type T	-210 to 400	25
	TC Type R	-10 to 1760	100
	TC Type S	-10 to 1760	100
	TC Type E	-200 to 1000	50
	TC Type F(L)	-100 to 600	25
	TC Type N	-180 to 1300	50
	TC Type [X] ³	± 9999	Custom
Linearisation	BS 4937 / IEC 584-3		
Basic Measurement Accuracy ²	±0.04% FRI ±0.04% Rdg or 0.5°C (Which ever is greater)		
Thermal Drift	Zero 0.1µV/ °C, Span 100 ppm/°C		
Cold Junction Error	±0.5°C		
Cold Junction Tracking	0.05°C/ °C		
Cold Junction Range	-40 to +85 °C		

2.13 Millivolt Input

Input Range	Voltage Source -10 to +75 mV
Characterisation	Linear Custom [X] ³ , 4th order polynomial
Minimum Span ¹	5 mV
Basic Measurement Accuracy ²	±10µV ±0.07% Rdg
Input Impedance	10 M ohm
Thermal Drift	Zero 0.1µV/°C, Span 100 ppm / °C

2.14 Slidewire Input

Input Resistance Range	3 Wire potentiometer 10 ohm to 390 ohm (End to End) Larger values can be accommodated by external resistor
Characterisation	Linear Custom [X] ³ , 4th order polynomial
Minimum Span ¹	5%
Basic Measurement Accuracy ²	0.1% FRI
Temperature Drift	100 ppm / °C

- Notes.
- 1 Any span may be selected, full accuracy is only guaranteed for spans greater than the minimum recommended.
 2. Basic Measurement Accuracy includes the effects of calibration, linearisation and repeatability.
 3. Customer linearisation requirements are available preprogrammed at the factory, contact your supplier for details.
 4. Consult thermocouple reference standards for thermocouple material limitation.

2.2 Output

Output Range	4-20mA (>3.8 to <20.2 mA)
Maximum Output	23mA
Accuracy	±5µA
Voltage Effect	0.2µA /V
Thermal Drift	1µA / °C
Supply Voltage	10 to 35V
Maximum Output Load	[(Vsupply - 10)/20] K ohms (eg 700 ohms @ 24V)

2.3 General

Input/Output Isolation	500VAC rms (galvanically isolated)
Update Time	250 mS Maximum
Time Constant (Filter Off)	< 1 Second (Time to reach 63% final value)
Filter Factor Programmable	Off, 2 seconds, 10 seconds or adaptive
Warm-up Time	2 minutes to full accuracy

Environmental

Ambient Operating Range	-40 to 85°C
Ambient Storage Temperature	-50 to 100°C
Ambient Humidity Range	10 to 90% RH non condensing

Approvals

Emissions	EN50081-1
Immunity	EN50082-2

Mechanical

Enclosure	DIN standard terminal block size
Material	ABS
Weight	27g
Dimensions	43mm diameter x 21mm

Communications

PC Interface	RS232 via configurator
Minimum Output Load	250 ohms for 'In Loop' programming
Maximum Cable Length	1000m
Configurable Parameters	Sensor type: Burnout: °C/°F: Output: Hi/Lo: Filter: Tag: User Offset
Comms Protocol	ANSI X3.28 1976
Data Rate	1200 baud

2.4 Hazardous Area Approvals

2.4.1 Intrinsically Safe Applications

SEM210X	EEx ia IIC T4...T6 KEMA Ex-D.3044X
---------	---------------------------------------

Special conditions for safe use:- The apparatus must only be connected to intrinsically safe circuits with the following maximum values : Umax - 30V ; Imax - 100mA ; Pmax - 750mW

The apparatus must be housed in an enclosure which provides a degree of protection of IP20 for the terminals as per EN60529

2.4.2. Type 'N' Applications

SEM210N	Ex N II T4...T6 KEMA Ex-97.Y.3045X
---------	---------------------------------------

Special conditions for safe use:- The apparatus must only be connected to circuits with the following maximum values under normal operating conditions : Umax - 30V ; Imax - 100mA ; Pmax - 750mW

The apparatus must be housed in an enclosure which provides a degree of protection of IP54 for the terminals as per EN60529

2.4.3 FM Applications

Factory Mutual: Intrinsically safe apparatus for CLI, DIV1, GP ABCD T4@85°C; T5@50°C; T6@40°C for installation and maintenance see control drawing SA4-3429-01.

3.0 INSTALLATION


3.1 Mechanical

The transmitter is mounted using two 5.5mm diameter holes, on standard 33 mm fixing centres and will fit a DIN standard termination head. The transmitter should be installed with adequate protection from moisture and corrosive atmospheres.

SEM210X, N and FM versions must be installed as section 2.4. It is the responsibility of the installer to follow the relevant installation / wiring regulations when installing apparatus in hazardous areas.

Care must be taken when locating the transmitter to ensure the ambient temperature remains within the specified operating range. Figure 1 shows the mechanical layout and a typical application of the transmitter mounted inside a termination head enclosure, with sensor wires entering through the centre of the transmitter body.

Figure 1

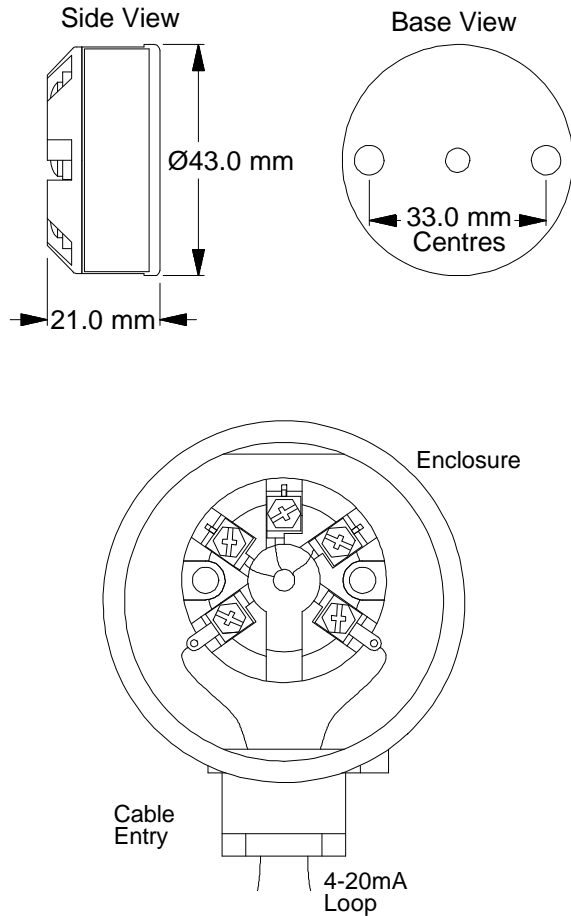


3.2 Electrical

Connections to the transmitter are made to the screw terminals provided on the top face. No special wires are required for the output connections, but screened twisted pair cable are the most suitable for long runs. It is recommended that screened cable is used for the three input signal wires for cable runs greater than one metre. All three input wires must have the same core diameter to maintain equal lead resistance in each wire. A Ø4.5mm hole is provided through the centre of the transmitter to allow sensor wires to be threaded through the transmitter body direct to the input screw terminals. The screw terminals have been designed to allow all connection wires to enter from an inner or an outer direction.

Figure 2 shows the method of connection to provide a 4-20 mA current loop output. The Pt100 sensor shown would normally take the form of a probe assembly with a three wire connection. The output loop has a voltage power supply used to provide loop excitation. The load symbol represents other equipment in the loop, normally indicators, controllers or loggers. Care must be taken when designing the 4-20mA circuit to ensure that the total voltage requirements of all the equipment in the loop added together, does not exceed the power supply voltage. If a number of instruments are connected in the loop, ensure that only one instrument is tied to ground. Grounding the loop at two points will cause a short circuit of part of the loop leading to measurement errors.

To guarantee CE compliance, sensor leads must be less than 3 metres long and the transmitter housing should prevent access to the transmitter during normal operation.

Figure 2

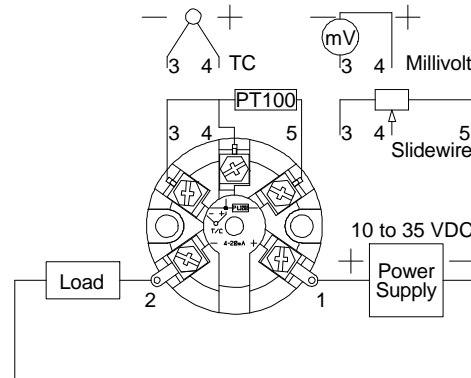

SEM210 SERIES PROGRAMMABLE IN-HEAD TEMPERATURE TRANSMITTER

Designed, manufactured and supported by :

STATUS INSTRUMENTS LTD

Green Lane
Tewkesbury
Glos. GL20 8HD
UK
Sales : 01684 853300
Support : 01684 853301
Fax : 01684 293746
Email: support@status.co.uk

Every effort has been taken to ensure the accuracy of this specification, however we do not accept responsibility for damage, injury, loss or expense resulting from errors and omissions, and we reserve the right of amendment without notice.

Stock code : 52-214-2186-02

Issue : 01